



CKI

SUPER GLOSS PAINTS

FAST DRYING



**MULTI PURPOSE
INDUSTRIAL GLOSS PAINT**



SUPER GLOSS PAINTS



Pangkok **3707B**



Sky Blue **506**



Sunrise **2017**



Shell Yellow 28 **6148**



Petronas Green **11007**




Fiesta Blue **684**



Mandarin **1331**



BHPetrol Yellow **6269**



Conifer **13339**



Neptune **2031**



Signal Red **437**



Lemon **2024**



Spruce **426**



STM 90 Blue **1288**



Scarlet **14361**



Mocha Latte **12686**



Carlsberg Green 94 **3387**



Wira Blue **11227**



Heritage Red **14360**



Oak **1322**



Deep Green **3427**



Regal Blue **613**



Leather **2037**



Antique **2016**

FAST DRYING

MULTI PURPOSE INDUSTRIAL GLOSS PAINT



Ivory 32



Papyrus 2056



Silver Mist 693



Sugar Cane 652



Magnolia 633



Pewter 695



Bamboo 57



Butter 6608B



Executive Grey 104



Suede 116



Tractor Yellow 6203



Papier Grey 1139

PROTECTIVE COATINGS

CONVENTIONAL METAL PRIMER



Grey



Zinc Chromate Primer Grey Green



Red Oxide Primer

UNIVERSAL ETCHING PRIMER



Grey S34



S34 Green



Red S34




Aluminium



SUPER GLOSS PAINTS

FAST DRYING

MULTI PURPOSE INDUSTRIAL GLOSS PAINT

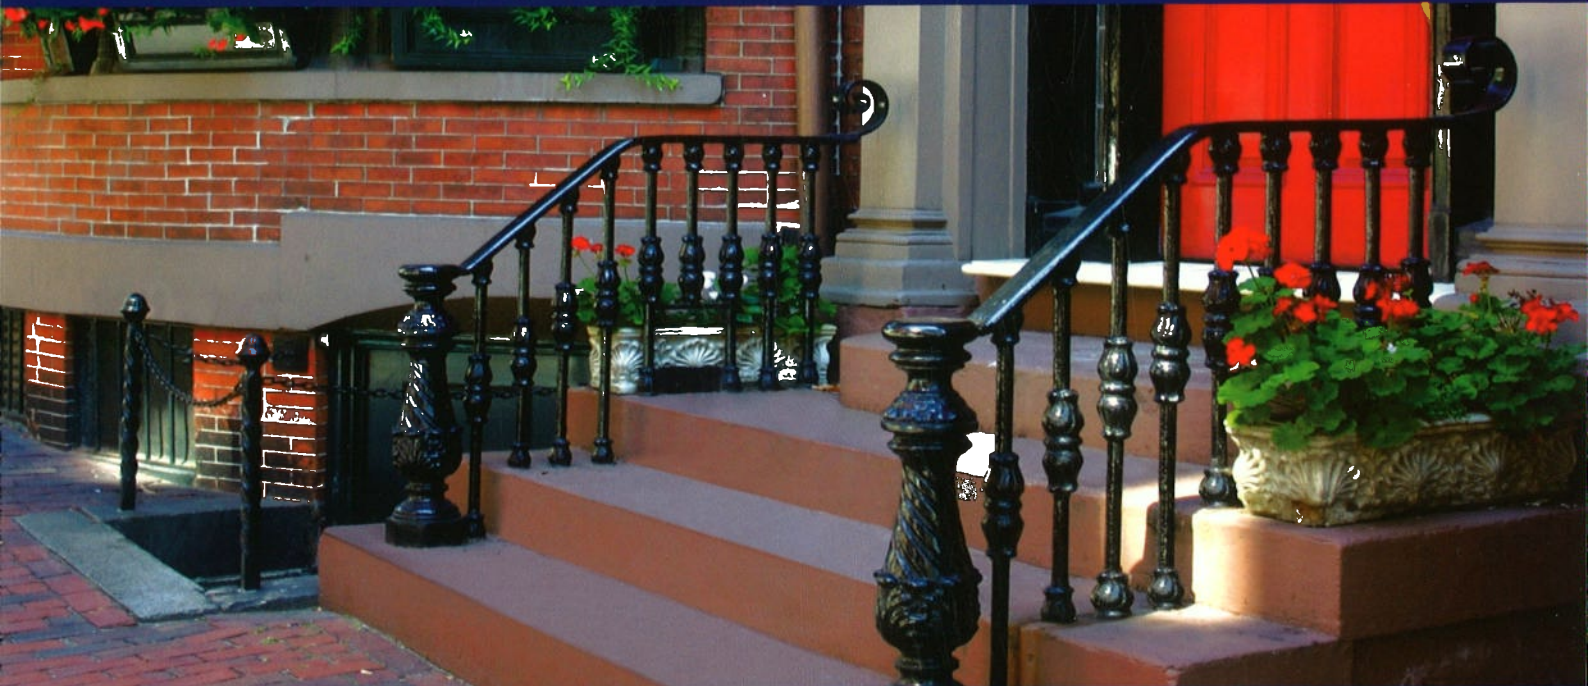

CKI SUPERGLOSS is a premium grade alkylid enamel fast drying paint, specially formulated for wood and metal surfaces. It has an excellent gloss appearance, colour retention, durable and outstanding fungus resistance.

DIRECTION FOR USE

- Ensure surface is clean and free from all contaminants.
- Lightly sand down surface for better adhesion and apply an appropriate CKI primer or CKI undercoat.
- Stir paint well before use.
- Apply with brush, roller or spray.
- For better finish, apply two or more coats; recoatable in 2 hours.
- Use CKI General Purpose Thinner for thinning down or cleaning.
- Approximate coverage 12-15 square metres per litre.
- Curing Period :
Touch Dry in 30 minutes.
Hard Dry in 1½ hours.

CKI SUPERGLOSS adalah sejenis cat enamel alkid gred premium yang cepat kering, dirumus khas untuk permukaan kayu dan logam. Cat ini mempamerkan permukaan kilat yang unggul, daya tahan warna, lasak serta kalis pertumbuhan kulat.

CARA MENGGUNA

- Pastikan permukaan bersih dan bebas daripada sebarang kekotoran.
- Gosokkan permukaan dengan kertas pasir untuk meningkatkan daya lekatan; kemudian sapukan satu lapisan cat Primer CKI atau CKI Undercoat yang sesuai.
- Kacau hingga sebati sebelum digunakan.
- Gunakan berus, penggelak atau penyebur.
- Untuk hasil yang lebih memuaskan, sapukan dua atau lebih lapisan cat. Pengcatan lapisan semula boleh dibuat selepas 2 jam.
- Gunakan Pencair Pelbagai Guna CKI untuk membersihkan atau mencairkan cat.
- Liputan per liter adalah lebih kurang 12-15 meter persegi.
- Tempoh Kering :
Kering boleh disentuh dalam 30 minit.
Cat kering sepenuhnya dalam 1½ jam.

CKI超级光面漆乃质地优越的人造树脂光面漆，特别配制献给木质与金属质表面。它具有柔滑的光泽、漆膜色泽持久、耐用及抗霉性能。

运用指南

- 确保表面干净，不染污渍。
- 将表面轻磨以获得最佳的附粘性再髹上 CKI Primer或CKI Undercoat。
- 使用前先将漆搅匀。
- 可采用漆扫，滚轴或喷射器。
- 为使漆面更光滑，髹两层或多层，间隔2小时后再上漆。
- 采用CKI General Purpose Thinner天那水调薄或清洗。
- 每公升漆大约可髹12-15平方公尺面积。
- 干透时间：
表层干透于30分钟。
完全干透于1½小时。



INTERIOR



EXTERIOR



ROLL ON



BRUSH ON



SPRAY ON



WOOD



METAL



THINNER



RECOAT 2 HOURS



BUATAN MALAYSIA



1 MALAYSIA



Distributed by:

